


Product datasheet

Drywall screw for steel plate max 2 mm

V/S/B
VÄSTSVENSK BYGGSKRUV AB

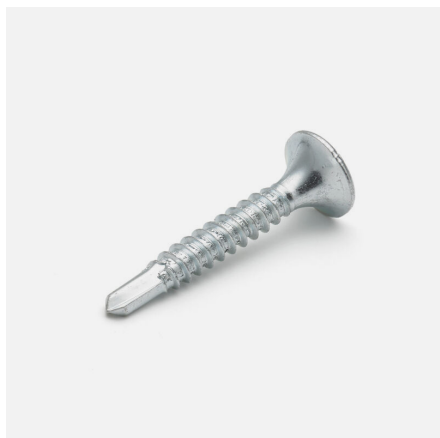

Function: Drill tip with single thread steel grooves, drills very quickly in steel thicknesses up to 2 mm, and sinks into the drywall without damaging the cardboard layer.



Track type bit: Philips 2.

Material: Case hardened steel.

Coating: ZP = electricity galvanised 5 my, PHO = phosphated, for indoor use.

Installation instructions: A power screwdriver with depth stop, speed of 2,000-3,000 rpm is recommended.

Sizing: Around 15 pcs/m², screw spacing 20 cm on the edge of the sheet and 30 cm on the inner section.



D	L	Surface treat.	G	Art.no	Quantity	Pack.	MB
3.5	25	PHO	20	F5025	10000	Bulk pack	
3.5	25	PHO	20	F5125	1000	Packaging	8
3.5	25	PHO	20	F5925	250	Packaging	16
3.5	25	ZP	20	5025	10000	Bulk pack	
3.5	25	ZP	20	5125	1000	Packaging	8
3.5	25	ZP	20	5925	250	Packaging	16
3.5	42	PHO	35	F5042	5000	Bulk pack	
3.5	42	PHO	35	F51429	600	Packaging	8
3.5	42	PHO	35	F5942	200	Packaging	16
3.5	42	ZP	35	5042	5000	Bulk pack	
3.5	42	ZP	35	51429	600	Packaging	8
3.5	42	ZP	35	5942	200	Packaging	16
3.9	51	PHO	45	F5051	3500	Bulk pack	
3.9	51	PHO	45	F51519	400	Packaging	8
3.9	51	ZP	45	5051	3500	Bulk pack	
3.9	51	ZP	45	51519	400	Packaging	8
3.9	51	ZP	45	5951	200	Packaging	12
4.2	75	PHO	40	F5075	2000	Bulk pack	

NOTE: The phosphated screw has a double head.



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden



Product datasheet

Drywall screw for steel plate max 2 mm



D	L	Surface treat.	G	Art.no	Quantity	Pack.	MB
4.2	75	PHO	40	F5175	250	Packaging	8
4.2	75	ZP	40	5075	2000	Bulk pack	
4.2	75	ZP	40	5175	250	Packaging	8
4.2	75	ZP	40	5975	100	Packaging	16

NOTE: The phosphated screw has a double head.

CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

