


# Product datasheet

Drywall screw (external) for steel plate  
max 2 mm

**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB

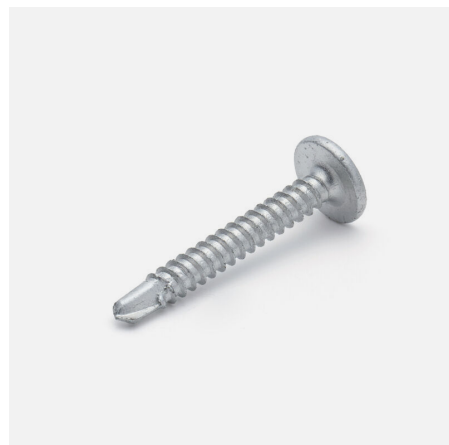

**Function:** Drill tip with single thread steel grooves, drills very quickly in steel thicknesses up to 2 mm. The screw meets the requirements of the AMA Hus 24 KBC.3111 for the installation of external wind protection plates. Suitable for installing external drywall boards.


**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB

**Track type bit:** Philips 2.

**Material:** Case hardened steel.

**Coating:** Zincotech Ag, corrosivity class C4, for outdoor use.

**Installation instructions:** A power screwdriver with a speed of 2,000-3,000 rpm is recommended.

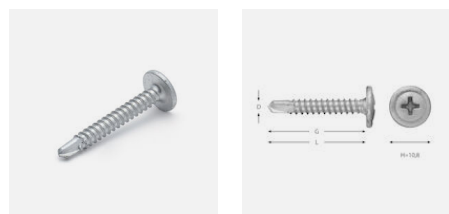

| D   | L  | G  | Art.no | E-number | Quantity | Pack.     | MB |
|-----|----|----|--------|----------|----------|-----------|----|
| 4.2 | 25 | 25 | B3250  |          | 7000     | Bulk pack |    |
| 4.2 | 25 | 25 | 32509  | 1533672  | 600      | Packaging | 8  |
| 4.2 | 25 | 25 | 325000 | 1534991  | 250      | Packaging | 16 |
| 4.2 | 31 | 31 | B3310  |          | 5000     | Bulk pack |    |
| 4.2 | 31 | 31 | 33109  | 1533673  | 500      | Packaging | 8  |
| 4.2 | 31 | 31 | 331000 | 1534259  | 200      | Packaging | 16 |



## CUSTOMER SERVICE

Tel. 033-23 03 03  
Email: vsb@vsbyggskruv.se  
Website: vsbyggskruv.se

## ADDRESS

Västsvensk Byggskruv AB  
Vävlagargatan 7  
507 30 Bråmhult  
Sweden

