


Product datasheet

Chipboard screw (TURBO) (PH) for wood stud

V/S/B
VÄSTSVENSK BYGGSKRUV AB

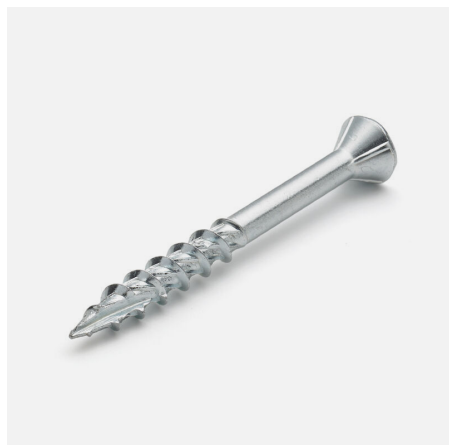

Function: Sharp tip and threads adapted for anchoring in wood. The threads immediately grip and tighten the screw to the chipboard, while the grooves underneath the head sink the screw. The unique tightening features of the screw have been achieved by providing the screw with a cutting drill tip, as well as with oblique and longitudinal flanks between the threads. This provides the following benefits:

- Less risk of cracks in wood.
- Lower torque when tightening.
- Less screwing time.

Track type bit: Philips 2.



Material: Case hardened steel.

Coating: Zinc-plated 5 my, for indoor use.

Installation instructions: A power screwdriver with depth stop, speed of 2,000-3,000 rpm is recommended.

Sizing: About 20 pcs/m², screw spacing 20 cm.

TURBO
SPÅNSKRUV®



D	L	G	Art.no	E-number	Quantity	Pack.	MB
4.2	30	19	AT8130		3000	Large box	
4.2	30	19	T8130		1000	Packaging	8
4.2	30	19	T8930		250	Packaging	16
4.2	51	29	T8051		3500	Bulk pack	
4.2	51	29	T8151		500	Packaging	8
4.2	51	29	T8951		200	Packaging	12
4.8	75	45	T8075		2000	Bulk pack	
4.8	75	45	T8175		250	Packaging	8
4.8	75	45	T8975		100	Packaging	16

NOTE: Packs are only sold in multiples of ten.

1/1

CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

