


Product datasheet

Chipboard screw for steel plate max 2 mm

V/S/B
VÄSTSVENSK BYGGSKRUV AB

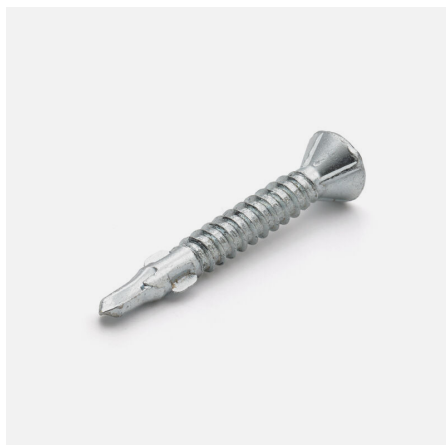

Function: Drill tip and threads adapted for anchoring to steel up to 2 mm. The wings mill out the hole in the timber. When the drill tip passes through the steel the wings break off. The grooves under the head sink the screw.



Track type bit: Philips 2.

Material: Case hardened steel.

Coating: Zinc-plated 5 my, for indoor use.

Installation instructions: A power screwdriver with depth stop, speed of 2,000-3,000 rpm is recommended.

Sizing: About 20 pcs/m², screw spacing 20 cm.



D	L	G	Max comp. thick. app. mm	Art.no	E-number	Quantity	Pack.	MB
3.8	30	26	15	4330		8000	Bulk pack	
3.8	30	26	15	44309		800	Packaging	8
3.8	30	26	15	4930		250	Packaging	16
3.8	41	37	25	4341		5000	Bulk pack	
3.8	41	37	25	44419		600	Packaging	8
3.8	41	37	25	4941		200	Packaging	16
3.8	57	53	42	4357		3500	Bulk pack	
3.8	57	53	42	44579		400	Packaging	8
3.8	57	53	42	4957		150	Packaging	16



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Bråmhult
Sweden

