


Product datasheet

Chipboard screw (external) for steel plate
max 2 mm

V/S/B
VÄSTSVENSK BYGGSKRUV AB

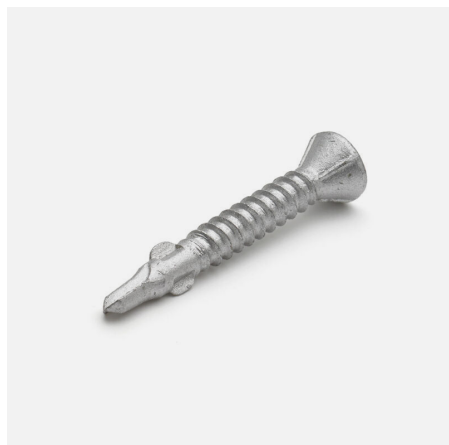

Function: Drill tip and threads adapted for anchoring to steel up to 2 mm. The wings mill out the hole in the timber. When the drill tip passes through the steel the wings break off. The grooves under the head sink the screw. Suitable for assembly of chipboard, OSB, Plywood and other wood-based boards.


V/S/B
VÄSTSVENSK BYGGSKRUV AB

Track type bit: Philips 2.

Material: Case hardened steel.

Coating: Zincotech Ag, corrosivity class C4, for outdoor use.

Installation instructions: A power screwdriver with depth stop, speed of 2,000-3,000 rpm is recommended.

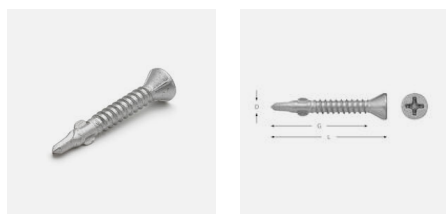

D	L	G	Max comp. thick. app. mm	Art.no	E-number	Quantity	Pack.	MB
3.8	30	26	15	B3330		8000	Bulk pack	
3.8	30	26	15	33309		800	Packaging	8
3.8	41	37	25	B3341		5000	Bulk pack	
3.8	41	37	25	33419		600	Packaging	8
3.8	57	53	42	B3357		3500	Bulk pack	
3.8	57	53	42	33579		400	Packaging	8



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

