


Product datasheet

Construction screw for beams max 6 mm

V/S/B
VÄSTSVENSK BYGGSKRUV AB

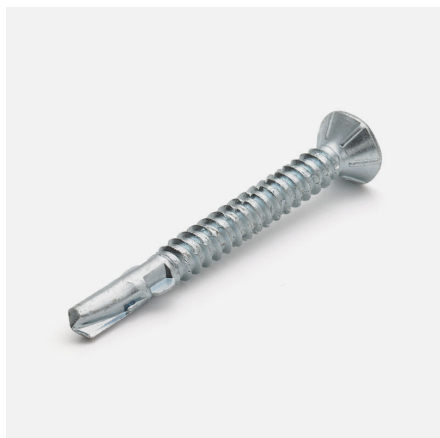



Function: Drill tip and threads adapted for anchoring to steel up to 6 mm. The wings mill out the hole in the timber. When the drill tip passes through the steel the wings break off. The grooves under the head sink the screw.

Track type bit: TX 25 and 30.

Material: Case hardened steel.

Coating: Zinc-plated 5 my, for indoor use.

Installation instructions: A power screwdriver with a speed of 1,000-2,000 rpm are recommended.



D	L	G	Bits/Socket	Min drill cap. mm	Max drill cap. mm	Max comp. thick. app. mm	Art.no	Quantity	Pack.	MB
4.8	45	42	25	1.3	3	25	B4445	5000	Bulk pack	
4.8	45	42	25	1.3	3	25	44459	400	Packaging 8	
5.5	50	46	25	1.3	6	25	B4450	3000	Bulk pack	
5.5	50	46	25	1.3	6	25	4450	250	Packaging 8	
5.5	70	66	25	1.3	6	45	B44629	2500	Bulk pack	
5.5	70	66	25	1.3	6	45	446299	200	Packaging 8	
6.3	100	95	30	1.3	6	70	B44879	1200	Bulk pack	
6.3	100	95	30	1.3	6	70	44879	100	Packaging 8	
6.3	120	115	30	1.3	6	90	B441129	700	Bulk pack	
6.3	120	115	30	1.3	6	90	441129	100	Packaging 8	

BASTA   Produkten bedömd i SundaHus Miljödata

B  BYGGVARU BEDÖMNINGEN

1/1

CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

