

Construction screw (external) for beam max 6 mm

V/S/B
VÄSTSVENSK BYGGSKRUV AB


Function: Drill tip and threads adapted for anchoring to steel up to 6 mm. The wings mill out the hole in the timber. When the drill tip passes through the steel the wings break off. The grooves under the head sink the screw.

Drive type: TX 25 and 30.

Material: Case hardened steel.

Surface treatment: Zincotech Ag, type approved for corrosivity class C4, no. 0167/07, for outdoor use.

Installation instruction: A power screwdriver with a speed of 1,000-2,000 rpm are recommended.

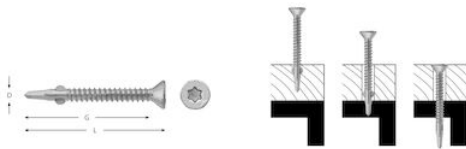

D	L	G	Bits/Socket	Min drill cap. mm	Max drill cap. mm	Max comp. thick. app. mm	Art.no	Quantity	Pack.	MB
4.8	45	42	25	1.3	3	25	B3345	5000	Bulk pack	
4.8	45	42	25	1.3	3	25	3345	400	Packaging	8
5.5	50	46	25	1.3	6	25	B3350	3000	Bulk pack	
5.5	50	46	25	1.3	6	25	3350	250	Packaging	8
5.5	70	66	25	1.3	6	45	B3370	2500	Bulk pack	
5.5	70	66	25	1.3	6	45	3370	200	Packaging	8
6.3	100	95	30	1.3	6	70	B33100	1200	Bulk pack	
6.3	100	95	30	1.3	6	70	33100	100	Packaging	8
6.3	120	115	30	1.3	6	90	B33120	700	Bulk pack	
6.3	120	115	30	1.3	6	90	33120	100	Packaging	8



BASTA   Produkten bedömd i SundaHus Miljödata

BYGGVARU BEDÖMNINGEN 

1/1

CUSTOMER SERVICE

Tel. 033-23 03 03
Fax 033-23 08 23
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

