

# Product datasheet

Wing screw (external) for beam max 6 mm

**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB



**Function:** Drill tip and threads adapted for anchoring to steel up to 6 mm. The wings mill out the hole in the timber. When the drill tip passes through the steel the wings break off. The grooves under the head sink the screw.


**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB

**Track type bit:** TX 25 and 30.

**Material:** Case hardened steel.

**Coating:** Zincotech Ag, corrosivity class C4, for outdoor use.

**Installation instructions:** A power screwdriver with a speed of 1,000-2,000 rpm are recommended.

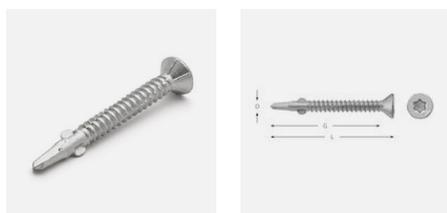

D	L	G	Bits/Socket	Min drill cap. mm	Max drill cap. mm	Max comp. thick. app. mm	Art.no	Quantity	Pack.	MB
4.8	45	42	25	1.3	3	25	B3345	5000	Bulk pack	
4.8	45	42	25	1.3	3	25	3345	400	Packaging	8
5.5	50	46	25	1.3	6	25	B3350	3000	Bulk pack	
5.5	50	46	25	1.3	6	25	3350	250	Packaging	8
5.5	70	66	25	1.3	6	45	B3370	2500	Bulk pack	
5.5	70	66	25	1.3	6	45	3370	200	Packaging	8
6.3	100	95	30	1.3	6	70	B33100	1200	Bulk pack	
6.3	100	95	30	1.3	6	70	33100	100	Packaging	8
6.3	120	115	30	1.3	6	90	B33120	700	Bulk pack	
6.3	120	115	30	1.3	6	90	33120	100	Packaging	8



## CUSTOMER SERVICE

Tel. 033-23 03 03  
Email: vsb@vsbyggskruv.se  
Website: vsbyggskruv.se

## ADDRESS

Västsvensk Byggskruv AB  
Vävlagargatan 7  
507 30 Bråmhult  
Sweden

