


Product datasheet

Fibre cement screw for wood studs and steel plates max 1 mm

V/S/B
VÄSTSVENSK BYGGSKRUV AB

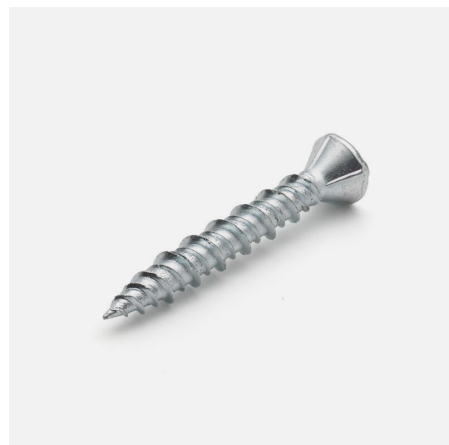

Function: Straight tip with double thread wood and steel grooves (Hi-low) that grip immediately, penetrate the wood studs and steel plate very quickly as the grooves under the head sink the screw.

V/S/B
VÄSTSVENSK BYGGSKRUV AB


Track type bit: Philips 2.

Material: Case hardened steel.

Coating: Zinc-plated 5 my, for indoor use.

Installation instructions: A power screwdriver with depth stop, speed of 2,000-3,000 rpm is recommended.

Sizing: Around 15 pcs/m², screw spacing 20 cm on the edge of the sheet and 30 cm on the inner section.

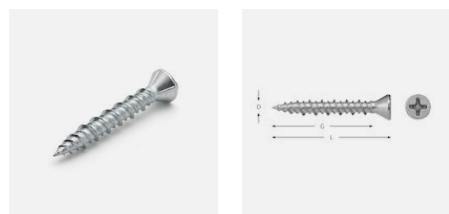

D	L	G	Art.no	E-number	Quantity	Pack.	MB
4.2	30	26	MI1830		8000	Bulk pack	
4.2	30	26	MI1930		1000	Packaging	8
4.2	30	26	MI9930		250	Packaging	16
4.2	41	35	MI1841		5000	Bulk pack	
4.2	41	35	MI19419		600	Packaging	8
4.2	41	35	MI9941		200	Packaging	16
4.2	57	50	MI1857		3500	Bulk pack	
4.2	57	50	MI19579		400	Packaging	8
4.2	57	50	MI9957		150	Packaging	16



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

