


# Product datasheet

Flooring screw for wood stud

**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB

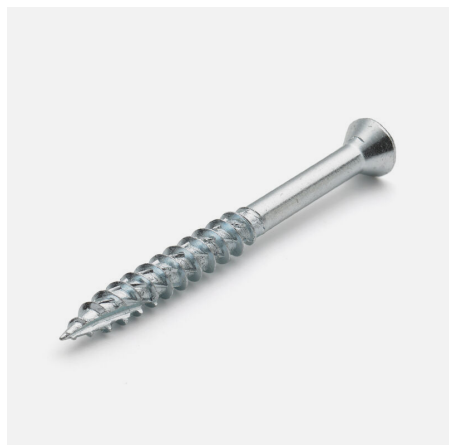

**Function:** Sharp tip and threads adapted for anchoring in wood. The threads grip immediately and tighten the screw to the wood floor, as the head sink in by itself. The unique tightening features of the screw have been achieved by providing the screw with a cutting drill tip, as well as with oblique and longitudinal flanks between the threads. This provides the following benefits:

- Less risk of cracks in wood.
- Lower torque when tightening.
- Less screwing time.

**Track type bit:** TX 15.



**Material:** Case hardened steel.

**Coating:** Zinc-plated 5 my, for indoor use.

**Sizing:** About 10-16 pcs/m<sup>2</sup>.

**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB

**NOTE:** Screwed at 45°.



D	L	G	Max comp. thick. app. mm	Art.no	E-number	Quantity	Pack.	MB
3.9	41	24	17	9043		5000	Bulk pack	
3.9	41	24	17	91439		700	Packaging	8
3.9	41	24	17	9943		200	Packaging	16
3.9	57	34	30	9059		3500	Bulk pack	
3.9	57	34	30	91599		400	Packaging	8
3.9	57	34	30	9959		200	Packaging	12



## CUSTOMER SERVICE

Tel. 033-23 03 03  
Email: vsb@vsbyggskruv.se  
Website: vsbyggskruv.se

## ADDRESS

Västsvensk Byggskruv AB  
Vävlagargatan 7  
507 30 Brämhult  
Sweden

