


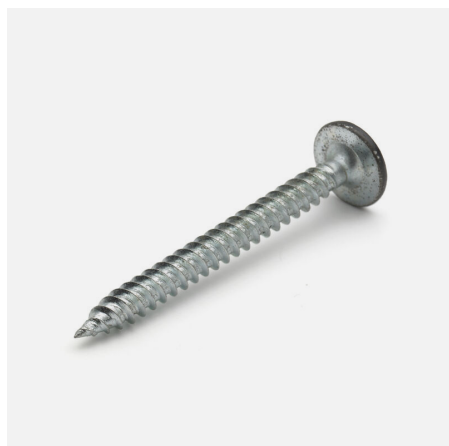

Function: Sharp point with double-cut threads that grip immediately in wood and steel studs. Suitable for installation of acoustic panels.

Material: Case hardened steel.

Coating: Black lacquered RAL 9011, for indoor use

Installation instructions: A power screwdriver with a speed of 2,000–3,000 rpm is recommended.



D	L	G	Colour	Art.no	Quantity	Pack.	MB
4.2	38	38	Black RAL 9011	S4238	200	Packaging	12
4.2	38	38	Black RAL 9011	SBS4238	15	Pack	10

NOTE: Packs are only sold in multiples of ten.

