

Product datasheet

Collated drywall screw for wood stud

V/S/B
VÄSTSVENSK BYGGSKRUV AB



Function: Sharp tip and threads adapted for anchoring in wood. The threads immediately grip and tighten the screw to the drywall without damaging the cardboard layer.

V/S/B
VÄSTSVENSK BYGGSKRUV AB


Track type bit: Philips 2.

Material: Case hardened steel.

Coating: Zinc-plated 5 my, for indoor use.

Installation instructions: A power screwdriver with a speed of 2,000-5,000 rpm is recommended.

Sizing: Around 15 pcs/m², screw spacing 20 cm on the edge of the sheet and 30 cm on the inner section.

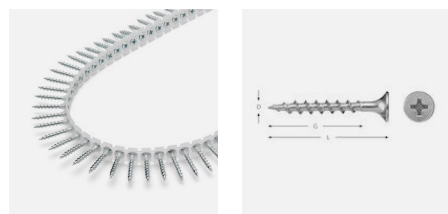

| D | L | G | Art.no | E-number | Quantity | Pack. | MB |
|-----|----|----|--------|----------|----------|-----------|----|
| 3.9 | 30 | 25 | RB3030 | | 1000 | Packaging | 10 |
| 3.9 | 41 | 36 | RB3041 | | 1000 | Packaging | 10 |
| 3.9 | 51 | 46 | RB3051 | | 1000 | Packaging | 8 |
| 3.9 | 55 | 50 | RB3055 | | 1000 | Packaging | 8 |



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Bråmhult
Sweden

