

Product datasheet

Collated drywall screw special for steel plate max 1 mm

V/S/B
VÄSTSVENSK BYGGSKRUV AB



Function: Straight tip with double thread grooves that grip immediately, penetrate the steel plate very quickly and sink into the drywall board without damaging the cardboard layer. Suitable for drywall installation where the inner board is made of chipboard or plywood.

V/S/B
VÄSTSVENSK BYGGSKRUV AB


Track type bit: Philips 2.

Material: Case hardened steel.

Coating: Zinc-plated 5 my, for indoor use.

Installation instructions: A power screwdriver with a speed of 2,000-3,000 rpm is recommended.

Sizing: Around 15 pcs/m², screw spacing 20 cm on the edge of the sheet and 30 cm on the inner section.

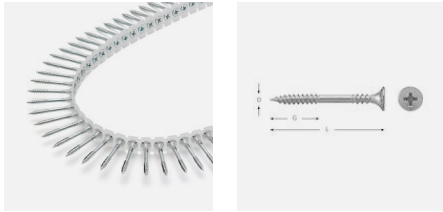

D	L	G	Art.no	E-number	Quantity	Pack.	MB
3.5	38	16	RBD2038		1000	Packaging	10



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

