

Product datasheet

Collated drywall screw combi for wood studs and steel plates max 1 mm



Function: Straight tip with double thread wood and steel grooves (Hi-low) that grip immediately, penetrate the steel plate very quickly and sink into the drywall board without damaging the cardboard layer.


Track type bit: Philips 2.

Material: Case hardened steel.

Coating: Zinc-plated 5 my, for indoor use.

Installation instructions: A power screwdriver with a speed of 2,000-5,000 rpm is recommended.

Sizing: Around 15 pcs/m², screw spacing 20 cm on the edge of the plate and 30 cm on the inner section.

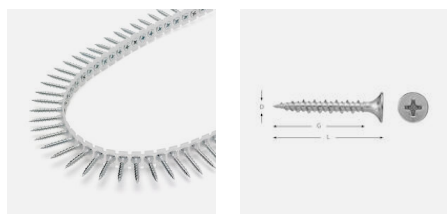

D	L	G	Art.no	E-number	Quantity	Pack.	MB
3.9	25	20	CRB3025		1000	Packaging	10
3.9	30	25	CRB3030		1000	Packaging	10
3.9	41	36	CRB3041		1000	Packaging	10
3.9	51	46	CRB3051		1000	Packaging	8
3.9	55	50	CRB3055		1000	Packaging	8



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

