

# Product datasheet

Collated drywall screw for steel plate max  
2 mm

**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB



**Function:** Drill tip with single thread steel grooves, drills very quickly in steel thicknesses up to 2 mm, and sinks into the drywall without damaging the cardboard layer.

**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB


**Track type bit:** Philips 2.

**Material:** Case hardened steel.

**Coating:** Zinc-plated 5 my, for indoor use.

**Installation instructions:** A power screwdriver with a speed of 2,000-3,000 rpm is recommended.

**Sizing:** Around 15 pcs/m<sup>2</sup>, screw spacing 20 cm on the edge of the plate and 30 cm on the inner section.

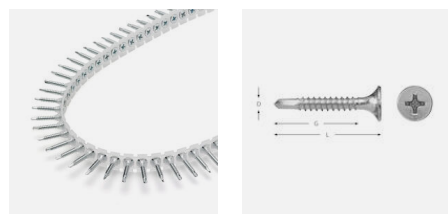

D	L	G	Art.no	E-number	Quantity	Pack.	MB
3.5	25	20	RB5025		1000	Packaging	10
3.5	42	37	RB5042		1000	Packaging	10
3.9	51	46	RB5051		1000	Packaging	8



## CUSTOMER SERVICE

Tel. 033-23 03 03  
Email: vsb@vsbyggskruv.se  
Website: vsbyggskruv.se

## ADDRESS

Västsvensk Byggskruv AB  
Vävlagargatan 7  
507 30 Brämhult  
Sweden

