

Product datasheet

Collated drywall screw for steel plate max 2 mm

V/S/B



Function: Drill tip with single thread steel grooves, drills very quickly in steel thicknesses up to 2 mm, and sinks into the drywall without damaging the cardboard layer.

Track type bit: Philips 2.

Material: Case hardened steel.


Coating: Zinc-plated 5 my, for indoor use.

Installation instructions: A power screwdriver with a speed of 2,000-3,000 rpm is recommended.

Sizing: Around 15 pcs/m², screw spacing 20 cm on the edge of the plate and 30 cm on the inner section.

V/S/B

VÄSTSVENSK BYGGSKRUV AB

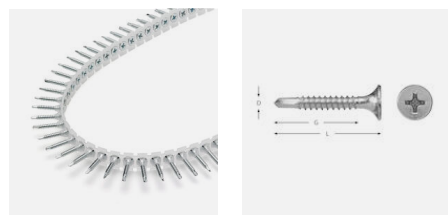

D	L	G	Art.no	Quantity	Pack.	MB
3.5	25	20	RB5025	1000	Packaging	10
3.5	42	37	RB5042	1000	Packaging	6
3.9	51	46	RB5051	1000	Packaging	6



Produkten bedömd i SundaHus Miljödata

EPD®
THE INTERNATIONAL EPD® SYSTEM

CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Bråmhult
Sweden

