

# Product datasheet

Collated drywall screw (external) for steel plate max 2 mm

**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB



**Function:** Drill tip with single thread steel grooves, drills very quickly in steel thicknesses up to 2 mm. The screw meets the requirements in AMA Hus 24 KBC.3111 for the installation of external wind protection plates. Suitable for installing external drywall boards.


**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB

**Track type bit:** Philips 2.

**Material:** Case hardened steel.

**Coating:** Zincotech Ag, corrosivity class C4, for outdoor use.

**Installation instructions:** A power screwdriver with a speed of 2,000-3,000 rpm is recommended.

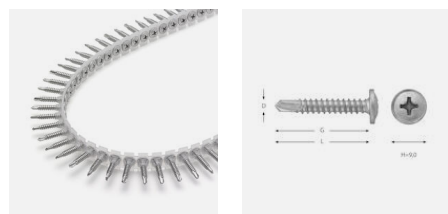

D	L	G	Art.no	E-number	Quantity	Pack.	MB
4.2	25	25	RB3250		1000	Packaging	10



## CUSTOMER SERVICE

Tel. 033-23 03 03  
Email: vsb@vsbyggskruv.se  
Website: vsbyggskruv.se

## ADDRESS

Västsvensk Byggskruv AB  
Vävlagargatan 7  
507 30 Brämhult  
Sweden

