

# Product datasheet

Collated drywall screw special for steel plate max 2 mm

**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB



**Function:** Drill tip and threads adapted for anchoring to steel up to 2 mm. The wings mill out the hole in the chipboard. When the drill tip passes through the steel, the wings break off and the head sinks into the drywall board without damaging the cardboard layer. Suitable for installation assembly where the innermost panel is made of chipboard or plywood.


**Track type bit:** Philips 2.

**Material:** Case hardened steel.

**Coating:** Zinc-plated 5 my, for indoor use.

**Installation instructions:** A power screwdriver with a speed of 2,000-3,000 rpm is recommended.

**Sizing:** Around 15 pcs/m<sup>2</sup>, screw spacing 20 cm on the edge of the plate and 30 cm on the inner section.

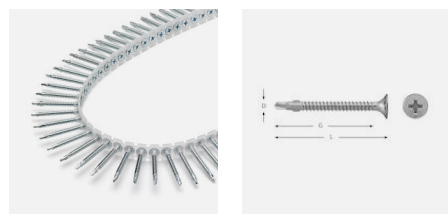

D	L	G	Art.no	E-number	Quantity	Pack.	MB
3.9	42	36	RBW5042		1000	Packaging	10



## CUSTOMER SERVICE

Tel. 033-23 03 03  
Email: vsb@vsbyggskruv.se  
Website: vsbyggskruv.se

## ADDRESS

Västsvensk Byggskruv AB  
Vävlagargatan 7  
507 30 Brämhult  
Sweden

