

Product datasheet

Collated hard drywall screw for steel plate
max 1 mm

V/S/B
VÄSTSVENSK BYGGSKRUV AB



Function: Sharp tip with double thread grooves that grip immediately and penetrate the steel plate very quickly. The reversing threads underneath the head allows the screw to sink into the drywall board without any problems.

V/S/B
VÄSTSVENSK BYGGSKRUV AB


Track type bit: Philips 2.

Material: Case hardened steel.

Coating: Zinc-plated 5 my, for indoor use.

Installation instructions: A power screwdriver with a speed of 2,000-5,000 rpm is recommended.

Sizing: Around 15 pcs/m², screw spacing 20 cm on the edge of the plate and 30 cm on the inner section.

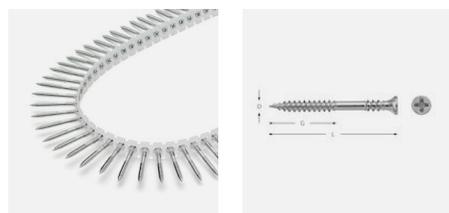

| D | L | G | Art.no | E-number | Quantity | Pack. | MB |
|-----|----|----|---------|----------|----------|-----------|----|
| 3.9 | 25 | 15 | RBS1025 | | 1000 | Packaging | 10 |
| 3.9 | 41 | 22 | RBS1041 | | 1000 | Packaging | 10 |



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

