

Product datasheet

Collated hard drywall screw combi for wood studs and steel plates max 1 mm



Function: Straight tip with double thread wood and steel grooves (Hi-low) that grip immediately, and penetrate the steel and wood stud very quickly. The reversing threads underneath the head allows the screw to sink into the drywall board without any problems.


Track type bit: Philips 2.

Material: Case hardened steel.

Coating: Zinc-plated 5 my, for indoor use.

Installation instructions: A power screwdriver with a speed of 2,000-5,000 rpm is recommended.

Sizing: Around 15 pcs/m², screw spacing 20 cm on the edge of the sheet and 30 cm on the inner section.

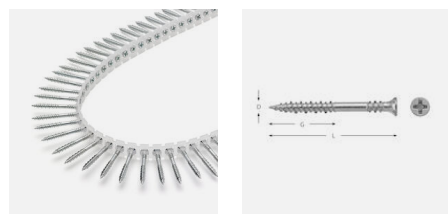

D	L	G	Art.no	E-number	Quantity	Pack.	MB
4.2	32	22	RB1032		1000	Packaging	10
4.2	41	22	RB1041		1000	Packaging	10
4.2	51	30	RB1051		1000	Packaging	8



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

