


Product datasheet

Collated hard drywall screw extreme for
wood stud and steel plates max 2 mm

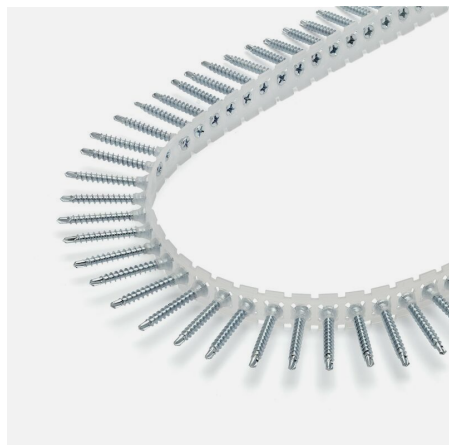

Function: Drill tip and threads adapted for anchoring to wood and steel up to 2 mm. The design of the head allows the screw to sink into the drywall board without any problems. Suitable for mounting extremely hard drywall board.

Track type bit: Philips 2.


Material: Case hardened steel.

Coating: Zinc-plated 5 my, for indoor use.

Installation instructions: A power screwdriver with a speed of 2,000-5,000 rpm is recommended.

Sizing: Around 15 pcs/m², screw spacing 20 cm on the edge of the plate and 30 cm on the inner section.

D	L	G	Art.no	E-number	Quantity	Pack.	MB
3.9	26	21	RBH1026		1000	Packaging	10
3.9	35	30	RBH1035		1000	Packaging	10
3.9	55	50	RBH1055		1000	Packaging	8



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

