

# Product datasheet

Collated hard drywall screw extreme for wood stud and steel plates max 2 mm

**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB



**Function:** Drill tip and threads adapted for anchoring to wood and steel up to 2 mm. The design of the head allows the screw to sink into the drywall board without any problems. Suitable for mounting extremely hard drywall board.

**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB


**Track type bit:** Philips 2.

**Material:** Case hardened steel.

**Coating:** Zinc-plated 5 my, for indoor use.

**Installation instructions:** A power screwdriver with a speed of 2,000-5,000 rpm is recommended.

**Sizing:** Around 15 pcs/m<sup>2</sup>, screw spacing 20 cm on the edge of the plate and 30 cm on the inner section.

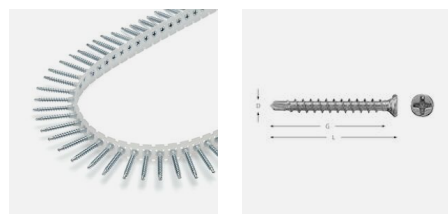

D	L	G	Art.no	E-number	Quantity	Pack.	MB
3.9	26	21	RBH1026		1000	Packaging	10
3.9	35	30	RBH1035		1000	Packaging	10
3.9	55	50	RBH1055		1000	Packaging	8



## CUSTOMER SERVICE

Tel. 033-23 03 03  
Email: vsb@vsbyggskruv.se  
Website: vsbyggskruv.se

## ADDRESS

Västsvensk Byggskruv AB  
Vävlagargatan 7  
507 30 Bråmhult  
Sweden

