

Product datasheet

Collated chipboard screw for wood stud

V/S/B
VÄSTSVENSK BYGGSKRUV AB



Function: Sharp tip and threads adapted for anchoring in wood. The threads grip immediately and tighten the screw to the chipboard, while the grooves underneath the head sink the screw. Suitable for assembly of chipboard, OSB, Plywood and other wood-based boards.

V/S/B
VÄSTSVENSK BYGGSKRUV AB


Track type bit: Philips 2.

Material: Case hardened steel.

Coating: Zinc-plated 5 my, for indoor use.

Installation instructions: A power screwdriver with a speed of 2,000-3,000 rpm is recommended.

Sizing: About 20 pcs/m², screw spacing 20 cm.

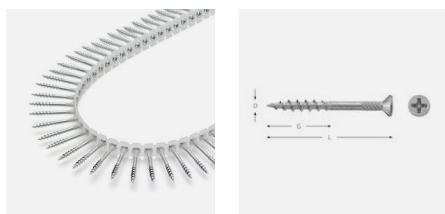

D	L	G	Art.no	E-number	Quantity	Pack.	MB
4.2	30	21	RB8030		1000	Packaging	10
4.2	41	21	RB8041		1000	Packaging	6
4.2	51	29	RB8051		1000	Packaging	8
4.2	55	33	RB8055		1000	Packaging	6



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

