

Product datasheet

Collated chipboard screw (phosphated)
for steel plate max 1 mm

V/S/B
VÄSTSVENSK BYGGSKRUV AB



Function: Straight tip with double thread grooves that grip immediately, penetrate the steel plate very quickly as the grooves under the head sink the screw. Suitable for assembly of chipboard, OSB, Plywood and other wood-based boards.

V/S/B
VÄSTSVENSK BYGGSKRUV AB


Track type bit: Philips 2.

Material: Case hardened steel.

Coating: Phosphated, for indoor use.

Installation instructions: A power screwdriver with a speed of 2,000-3,000 rpm is recommended.

Sizing: About 20 pcs/m², screw spacing 20 cm.

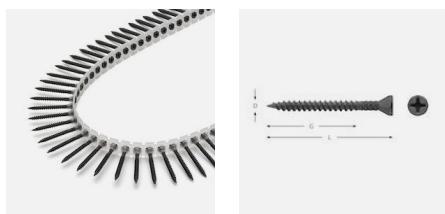

D	L	G	Art.no	E-number	Quantity	Pack.	MB
3.9	30	22	RBF1830		1000	Packaging	10
3.9	41	29	RBF1841		1000	Packaging	6



Produkten bedömd i
SundaHus Miljödata



EPD®
THE INTERNATIONAL EPD® SYSTEM

CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

