

Product datasheet

Collated chipboard screw (external) for
steel plate max 1 mm

V/S/B
VÄSTSVENSK BYGGSKRUV AB



Function: Straight tip with double thread grooves that grip immediately, penetrate the steel plate very quickly as the grooves under the head sink the screw. Suitable for assembly of chipboard, OSB, Plywood and other wood-based boards.


V/S/B
VÄSTSVENSK BYGGSKRUV AB

Track type bit: Philips 2.

Material: Case hardened steel.

Coating: Zincotech Ag, corrosivity class C4, for outdoor use.

Installation instructions: A power screwdriver with a speed of 2,000-3,000 rpm is recommended.

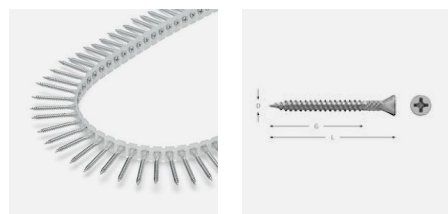

D	L	G	Art.no	E-number	Quantity	Pack.	MB
3.9	30	22	RB1630		1000	Packaging	6
3.9	41	29	RB1641		1000	Packaging	6



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

