


Product datasheet

Collated chipboard screw for steel plate
max 2 mm

V/S/B
VÄSTSVENSK BYGGSKRUV AB

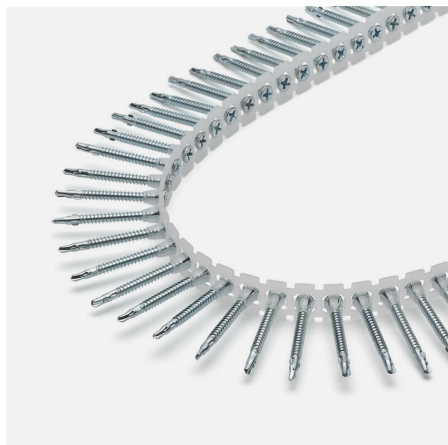

Function: Drill tip and threads adapted for anchoring to steel up to 2 mm. The wings mill out the hole in the timber. When the drill tip passes through the steel the wings break off. The grooves under the head sink the screw. Suitable for assembly of chipboard, OSB, Plywood and other wood-based boards.

V/S/B
VÄSTSVENSK BYGGSKRUV AB


Track type bit: Philips 2.

Material: Case hardened steel.

Coating: Zinc-plated 5 my, for indoor use.

Installation instructions: A power screwdriver with a speed of 2,000-3,000 rpm is recommended.

Sizing: About 20 pcs/m², screw spacing 20 cm.

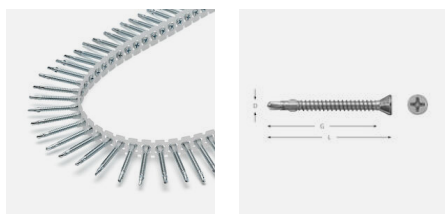

D	L	G	Max comp. thick. app. mm	Art.no	E-number	Quantity	Pack.	MB
3.8	30	26	15	RB4430		1000	Packaging	6
3.8	41	37	25	RB4441		1000	Packaging	6



Produkten bedömd i
SundaHus Miljödata



EPD®
THE INTERNATIONAL EPD® SYSTEM

CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

