


Product datasheet

Collated chipboard screw (external) for
steel plate max 2 mm

V/S/B
VÄSTSVENSK BYGGSKRUV AB

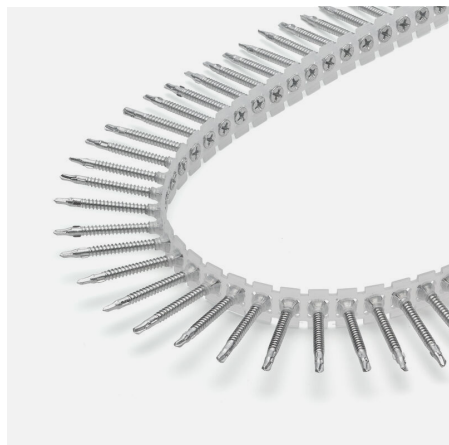

Function: Drill tip and threads adapted for anchoring to steel up to 2 mm. The wings mill out the hole in the timber. When the drill tip passes through the steel the wings break off. The grooves under the head sink the screw. Suitable for assembly of chipboard, OSB, Plywood and other wood-based boards.


V/S/B
VÄSTSVENSK BYGGSKRUV AB

Track type bit: Philips 2.

Material: Case hardened steel.

Coating: Zincotech Ag, corrosivity class C4, for outdoor use.

Installation instructions: A power screwdriver with a speed of 2,000-3,000 rpm is recommended.

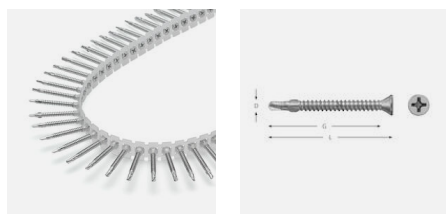

D	L	G	Max comp. thick. app. mm	Art.no	E-number	Quantity	Pack.	MB
3.8	30	26	15	RB3330		1000	Packaging	10
3.8	41	37	25	RB3341		1000	Packaging	6



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

