

Product datasheet

Collated decking screw (external) for wood stud

V/S/B
VÄSTSVENSK BYGGSKRUV AB



Function: Sharp tip and threads adapted for anchoring in wood. The threads grip immediately and tighten the screw to the decking, while the grooves underneath the head sink the screw. The screw also has a cutting drill tip to prevent cracks forming in the wood. Suitable for installation of decking, balconies, fences etc.

V/S/B
VÄSTSVENSK BYGGSKRUV AB

Track type bit: Philips 2.


Material: Case hardened steel.

Coating: Zincotech Au, corrosivity class C4, for outdoor use.

Installation instructions: A power screwdriver with a speed of 2,000-3,000 rpm are recommended, countersunk head approx 2mm.

Sizing: About 30 pcs/m².

D	L	G	Max comp. thick. app. mm	Art.no	E-number	Quantity	Pack.	MB
4.2	41	22	22	RB241		1000	Packaging	6
4.2	51	22	28	RB251		1000	Packaging	6
4.2	55	24	28	RB255		1000	Packaging	6

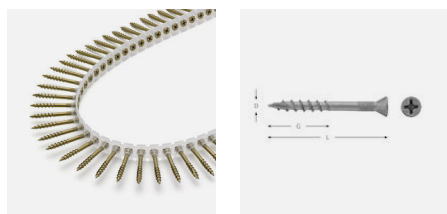

CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

