


Product datasheet

Façade screw (A2 stainless steel) for wood stud

V/S/B
VÄSTSVENSK BYGGSKRUV AB

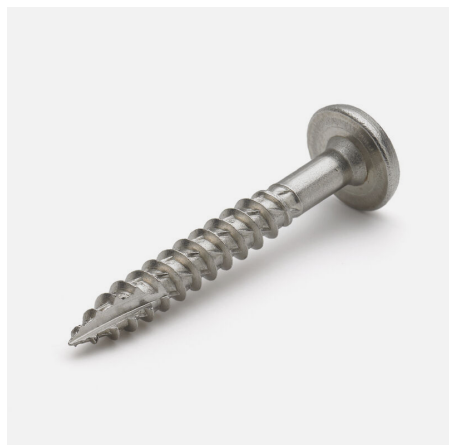


Function: Sharp tip and threads adapted for anchoring in wood. The head's low-profile pan design fits superbly to most external façade panels as well as other external attachments. The unique tightening features of the screw have been achieved by providing the screw with a cutting drill tip, as well as with oblique and longitudinal flanks between the threads. This provides the following benefits:

- Less risk of cracks in wood.
- Lower torque when tightening.
- Less screwing time.

Track type bit: TX 20.

Material: Stainless steel (A2).

Installation instructions: A power screwdriver with a speed of 1,500-2,500 rpm is recommended. The façade panels must be pre-drilled in cases the panel manufacturer recommends this.

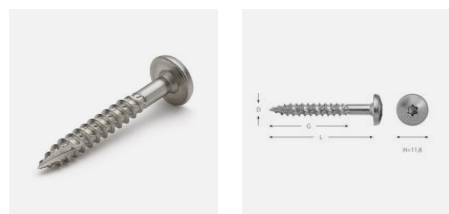

| D | L | G | Art.no | E-number | Quantity | Pack. | MB |
|-----|----|----|---------|----------|----------|-------------|----|
| 4.8 | 38 | 30 | B6838 | | 5000 | Bulk pack | |
| 4.8 | 38 | 30 | 683800 | | 200 | Packaging | 12 |
| 4.8 | 38 | 30 | P683800 | | 150 | Plastic box | 12 |

1/1

CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

