


# Product datasheet

Façade screw (A2 stainless steel) for wood stud

# V/S/B

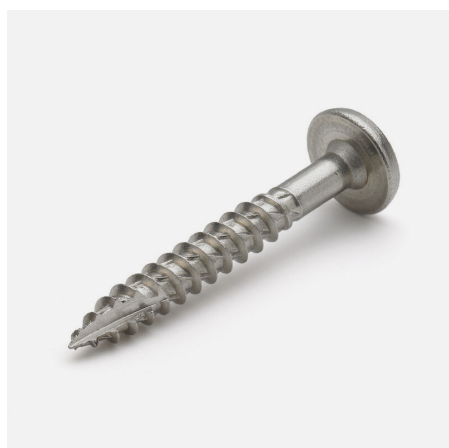

**Function:** Sharp tip and threads adapted for anchoring in wood. The head's low-profile pan design fits superbly to most external façade panels as well as other external attachments. The unique tightening features of the screw have been achieved by providing the screw with a cutting drill tip, as well as with oblique and longitudinal flanks between the threads. This provides the following benefits:

- Less risk of cracks in wood.
- Lower torque when tightening.
- Less screwing time.


**Track type bit:** TX 20.

**Material:** Stainless steel (A2).

**Installation instructions:** A power screwdriver with a speed of 1,500-2,500 rpm is recommended. The façade panels must be pre-drilled in cases the panel manufacturer recommends this.

# V/S/B

VÄSTSVENSK BYGGSKRUV AB

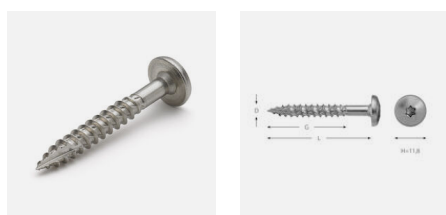

D	L	G	Art.no	Quantity	Pack.	MB
4.8	38	30	B6838	5000	Bulk pack	
4.8	38	30	683800	200	Packaging	12
4.8	38	30	P683800	150	Plastic box	12



## CUSTOMER SERVICE

Tel. 033-23 03 03  
Email: vsb@vsbyggskruv.se  
Website: vsbyggskruv.se

## ADDRESS

Västsvensk Byggskruv AB  
Vävlagargatan 7  
507 30 Bråmhult  
Sweden

