


Product datasheet

Plastic roofing screw (external) for wood stud

V/S/B
VÄSTSVENSK BYGGSKRUV AB

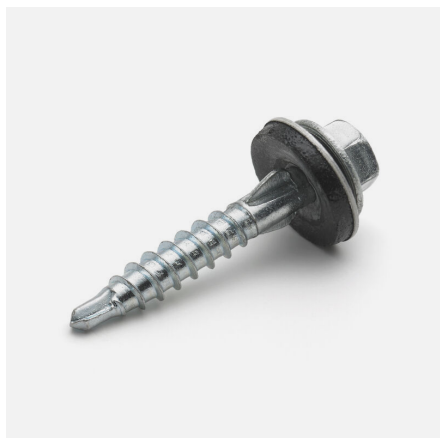

Function: Drill tip with diameter adapted to suit plastic, drills very quickly in plastic up to 2 x 1.25 mm. Wood thread provides solid anchoring in timber. The wings mill out the hole into the plastic. Hexagon head with flange for safe tightening. Sealing washer for secure seal.



Track type bit: Sleeve 8 mm.

Material: Case hardened steel and aluminium plate with vulcanised EPDM rubber.

Coating: Zinc-plated 20 my. Powder coated with polyester lacquer, for outdoor use.

Installation instructions: A power screwdriver with a speed of 1,500-2,500 rpm is recommended.

Sizing: About 8-10 pcs/m².



| D | L | Colour | Art.no | Quantity | Pack. | MB |
|-----|----|--------------------------|---------|----------|-----------|----|
| 5.5 | 35 | Dark grey RAL 7024 | 4836719 | 150 | Packaging | 8 |
| 5.5 | 35 | Dark grey RAL 7024 | 48367 | 50 | Packaging | 16 |
| 5.5 | 35 | Opal white RAL 7047 | 4837119 | 150 | Packaging | 8 |
| 5.5 | 35 | Opal white RAL 7047 | 48371 | 50 | Packaging | 16 |
| 5.5 | 35 | Silver RAL 9006 | 4836519 | 150 | Packaging | 8 |
| 5.5 | 35 | Silver RAL 9006 | 48365 | 50 | Packaging | 16 |
| 5.5 | 35 | Uncoloured clear lacquer | 4836919 | 150 | Packaging | 8 |
| 5.5 | 35 | Uncoloured clear lacquer | 48369 | 50 | Packaging | 16 |



BASTA

1/1

CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

