


Product datasheet

Plastic roofing screw (external) for wood stud

V/S/B
VÄSTSVENSK BYGGSKRUV AB

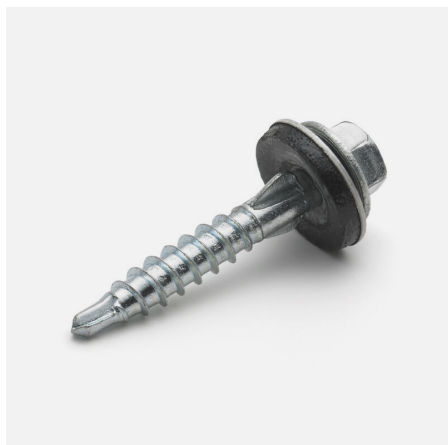

Function: Drill tip with diameter adapted to suit plastic, drills very quickly in plastic up to 2 x 1.25 mm. Wood thread provides solid anchoring in timber. The wings mill out the hole into the plastic. Hexagon head with flange for safe tightening. Sealing washer for secure seal.

V/S/B
VÄSTSVENSK BYGGSKRUV AB


Track type bit: Sleeve 8 mm.

Material: Case hardened steel and aluminium plate with vulcanised EPDM rubber.

Coating: Zinc-plated 20 my. Powder coated with polyester lacquer, for outdoor use.

Installation instructions: A power screwdriver with a speed of 1,500-2,500 rpm is recommended.

Sizing: About 8-10 pcs/m².



D	L	Colour	Art.no	E-number	Quantity	Pack.	MB
5.5	35	Dark grey RAL 7024	4836719		150	Packaging	8
5.5	35	Dark grey RAL 7024	48367		50	Packaging	16
5.5	35	Opal white RAL 7047	4837119		150	Packaging	8
5.5	35	Opal white RAL 7047	48371		50	Packaging	16
5.5	35	Silver RAL 9006	4836519		150	Packaging	8
5.5	35	Silver RAL 9006	48365		50	Packaging	16
5.5	35	Uncoloured clear lacquer	4836919		150	Packaging	8
5.5	35	Uncoloured clear lacquer	48369		50	Packaging	16

1/1

CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

