


Product datasheet

Light beam screw (external) for beam max
4 mm

V/S/B
VÄSTSVENSK BYGGSKRUV AB

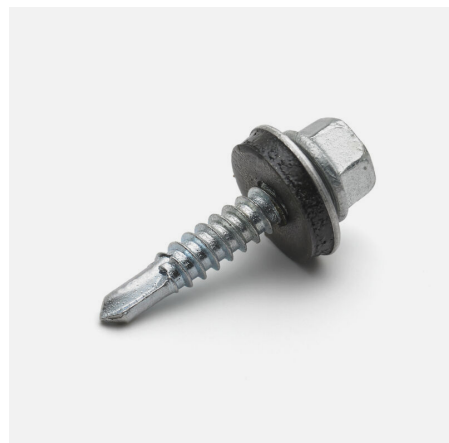

Function: Drill tip with diameter adapted to suit sheet metal, drills in beams from 1.3 mm up to 4.0mm. Steel thread provides solid anchoring in the beam. Hexagon head with flange for safe tightening. Sealing washer for secure seal.



V/S/B
VÄSTSVENSK BYGGSKRUV AB

Track type bit: Sleeve 8 mm.

Material: Case hardened steel and aluminium washer with vulcanised EPDM rubber.

Coating: Zinc-plated 20 my. Powder coated with polyester lacquer, for outdoor use.

Installation instructions: A power screwdriver with a speed of 1,500-2,500 rpm is recommended.



D	L	Colour	Art.no	E-number	Quantity	Pack.	MB
4.8	25	Black RAL 9005	48442		250	Packaging	8
4.8	25	Dark red RAL 3009	48445		250	Packaging	8
4.8	25	Uncoloured clear lacquer	48441		250	Packaging	8
4.8	25	White RAL 9010	48444		250	Packaging	8



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

