


Product datasheet

Building sheet screw (A2 stainless steel/bi metal) for beams max 12,5 mm

V/S/B
VÄSTSVENSK BYGGSKRUV AB

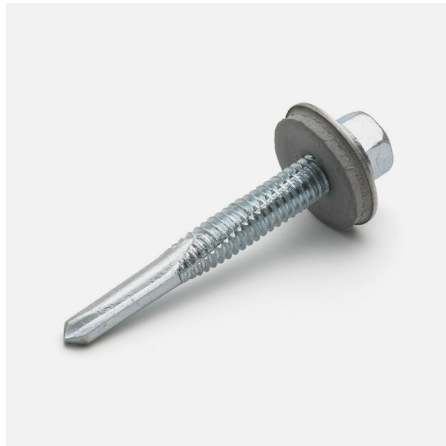

Function: Drill tip with diameter adapted to suit sheet metal, drills in beams up to 12.5 mm. Hexagon head with flange and sealing washer for safe tightening.

Track type bit: Clamping sleeve 8 mm.

Material: Stainless steel (A2) with welded drill tip in case hardened steel and stainless steel washer with vulcanised EPDM rubber.

Installation instructions: A power screwdriver with a speed of 1,500-2,500 rpm is recommended.

V/S/B
VÄSTSVENSK BYGGSKRUV AB



D	L	Min drill cap. mm	Max drill cap. mm	Art.no	Quantity	Pack.	MB
4.8	20	1.3	4	48121	250	Packaging	8
5.5	25	1.3	3.5	48122	250	Packaging	8
5.5	26	2	6	48123	250	Packaging	8
5.5	40	4	12.5	481249	150	Packaging	8



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

