




Product datasheet

Plastic plug

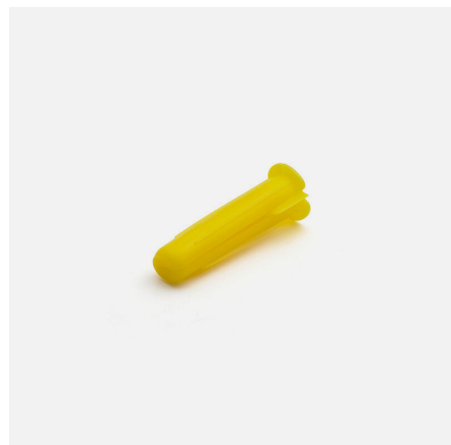

Function: The plug has a smooth surface that provides maximum contact with the material, while its colour coding makes it easy when selecting the correct plug size. The plug can be used with most building materials, but is best suited in solid materials such as concrete, stone and solid tile.

Material: Polythene.

Installation instructions: Drill a hole adapted to suit the size of the plug as shown in the table below. Push the plug into the hole. Fit the fastener with screw adapted to the plug as shown in the same table. The length of the screw should be about 5 mm longer than the plug and attachment together.



D	L	Colour	Min. drill depth mm	Drill mm	Screw dim. mm	Art.no	Quantity	Pack.	MB
5,5	22	Yellow	25	5,5	3,5-5,0	325025	100	Packaging	40
5,5	22	Yellow	25	5,5	3,5-5,0	SB325025	25	Pack	10
5,5	35	Red	40	5,5	3,5-5,0	325535	100	Packaging	16
5,5	35	Red	40	5,5	3,5-5,0	SB325535	20	Pack	10
8	40	Brown	45	8	5,0-6,0	328040	100	Packaging	12
8	40	Brown	45	8	5,0-6,0	SB328040	15	Pack	10
10	45	Blue	50	10	5,0-7,0	321045	50	Packaging	16
10	45	Blue	50	10	5,0-7,0	SB321045	10	Pack	10
12	60	Green	65	12	8,0-10,0	321260	25	Packaging	16
12	60	Green	65	12	8,0-10,0	SB321260	4	Pack	10
14	70	Grey	78	14	10,0-12,0	321470	20	Packaging	12
14	70	Grey	78	14	10,0-12,0	SB321470	2	Pack	10
16	80	Orange	88	16	12	321580	10	Packaging	12
16	80	Orange	88	16	12	SB321580	2	Pack	10

NOTE: Packs are only sold in multiples of ten.



Produkten bedömd i
SundaHus Miljödata



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

