


Product datasheet

Concrete screw countersunk (external)

V/S/B
VÄSTSVENSK BYGGSKRUV AB

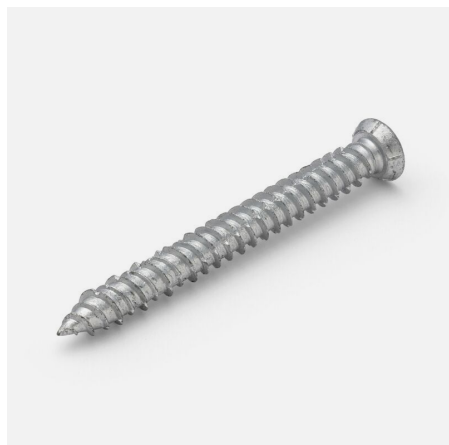

Function: Specially-hardened screw that is screwed directly into a pre-drilled hole without any plug. The concrete screw is used for installing in concrete.


V/S/B
VÄSTSVENSK BYGGSKRUV AB

Track type bit: TX 30.

Material: Case hardened steel.

Coating: Zincotech Ag, corrosivity class C4, for outdoor use.

Installation instructions: Drill a hole adapted to suit the size of the concrete screw as shown in the table below. Now screw in the concrete screw.

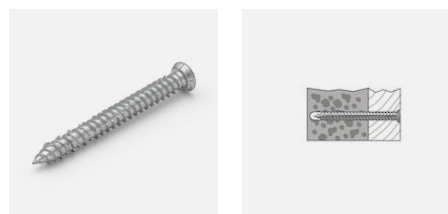

D	L	G	Max comp. thick. app. mm	Drill mm	Art.no	E-number	Quantity	Pack.	MB
7.5	72	68	40	6	B7372		1500	Bulk pack	
7.5	72	68	40	6	7372		100	Packaging	8
7.5	92	88	60	6	B7392		1000	Bulk pack	
7.5	92	88	60	6	7392		100	Packaging	8
7.5	112	108	80	6	B73112		600	Bulk pack	
7.5	112	108	80	6	73112		100	Packaging	8



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Bråmhult
Sweden

