


Product datasheet

Concrete screw Wafer coloured

V/S/B
VÄSTSVENSK BYGGSKRUV AB

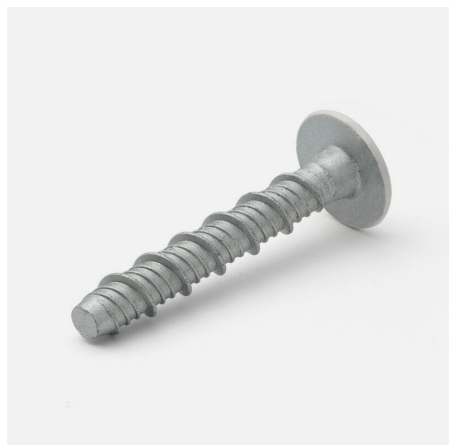

Function: Specially-hardened screw that is screwed directly into a pre-drilled hole without any plug. The concrete screw is used for installing in concrete.


Track type bit: TX 30.

Material: Case hardened steel.

Coating: White lacquered RAL 9010, for indoor use.

Installation instructions: Drill a hole adapted to suit the size of the concrete screw as shown in the table below. Now screw in the concrete screw perpendicular to the substrate. When the screw reaches the substrate, further tightening must be avoided.

V/S/B
VÄSTSVENSK BYGGSKRUV AB

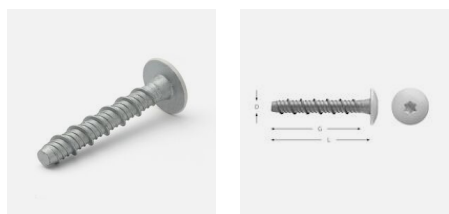

D	L	G	Max comp. thick. app. mm	Drill mm	Art.no	E-number	Quantity	Pack.	MB
7.5	45	45	5	6	BV737545		1500	Bulk pack	
7.5	45	45	5	6	V737545		100	Packaging	8
7.5	60	60	20	6	BV737560		1000	Bulk pack	
7.5	60	60	20	6	V737560		100	Packaging	8
7.5	75	75	35	6	BV737575		900	Bulk pack	
7.5	75	75	35	6	V737575		100	Packaging	8



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Bråmhult
Sweden

