


Product datasheet

Concrete screw Wafer (external)

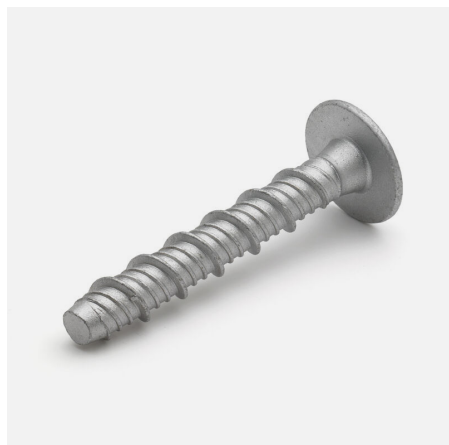


Function: Specially-hardened screw that is screwed directly into a pre-drilled hole without any plug. The concrete screw is used for installing in concrete.

Track type bit: TX 30.

Material: Case hardened steel.

Coating: Ruspert silver, for outdoor use.

Installation instructions: Drill a hole adapted to suit the size of the concrete screw as shown in the table below. Now screw in the concrete screw perpendicular to the substrate. When the screw reaches the substrate, further tightening must be avoided.

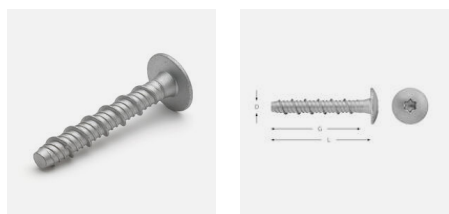

D	L	G	Max comp. thick. app. mm	Drill mm	Art.no	E-number	Quantity	Pack.	MB
7.5	45	45	5	6	B737545		1500	Bulk pack	
7.5	45	45	5	6	737545		100	Packaging	8
7.5	60	60	20	6	B737560		1000	Bulk pack	
7.5	60	60	20	6	737560		100	Packaging	8
7.5	75	75	35	6	B737575		900	Bulk pack	
7.5	75	75	35	6	737575		100	Packaging	8



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

