

Product datasheet

Drop in anchor




Function: European technically approved drop in anchor (ETA-02/0020, ETA-05/0116) with metric internal thread for installing in concrete.

Material: Steel.

Coating: Zinc-plated 5 my, for indoor use.

Installation instructions: Drill a hole adapted to suit the size of the drop in anchor as shown in the table below. Push the anchor into the hole. Expand the drop in anchor with a custom made punch.

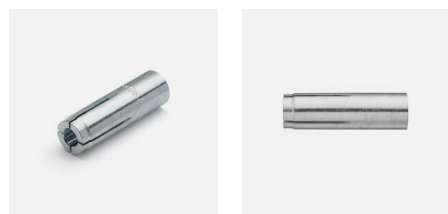

D	L	Min. drill depth mm	Drill mm	Art.no	Quantity	Pack.	MB
6	30	30	8	84601	100	Packaging	12
8	30	30	10	84602	100	Packaging	12
10	40	40	12	84603	50	Packaging	12
12	50	50	15	84604	50	Packaging	8
16	65	65	20	84605	25	Packaging	8
20	80	80	25	84606	25	Packaging	6



Produkten bedömd i
SundaHus Miljödata



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

