


Product datasheet

Frame socket screw hollow block

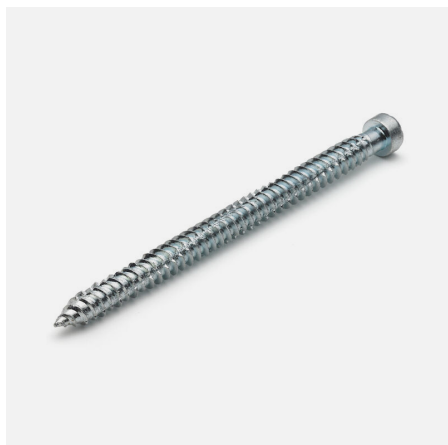



Function: The screw is designed to be used to lock the frame sockets in place when installing in hollow block.

Track type bit: TX 40.

Material: Case hardened steel.

Coating: Zinc-plated 5 my, for indoor use.

Installation instructions: Once the frame socket is fitted as instructed, the socket is fixed with a frame socket screw for hollow block, after which the frame can be set to the correct position. When installing in hollow block, drilling is required as shown in the table.



D	L	G	Drill mm	Art.no	Quantity	Pack.	MB
7.5	112	112	6	B44218	500	Bulk pack	
7.5	112	112	6	44218	75	Packaging	8
7.5	112	112	6	44318	25	Packaging	12
7.5	112	112	6	SB44218	6	Pack	10
7.5	112	112	6	SB442189	4	Pack	10

NOTE: Packs are only sold in multiples of ten.



Produkten bedömd i
SundaHus Miljödata



CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Bråmhult
Sweden

