


Product datasheet

Construction screw Jetting (external)

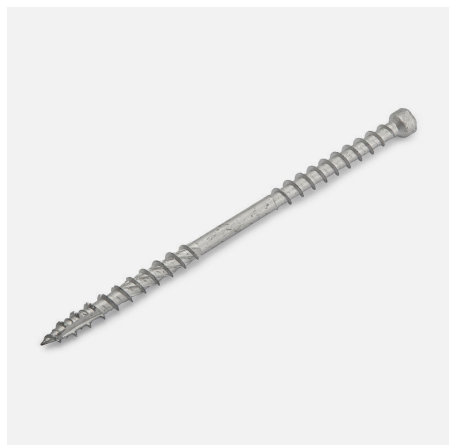


Function: Construction screw Jetting with double threads and cylinder head joins the timber in one working step. The different pitch of the threads creates a clamping force in the construction and the cylindrical head provides a discreet assembly. The patented thread with a cutting tip and slanted longitudinal cuts between the threads provides a lower screw-in torque and reduced risk of cracking in the wood. The screw replaces construction fittings and anchor screws and saves time during assembly.

- Less risk of cracks in wood.
- Lower torque when tightening.
- Installation without pre-drilling.

Track type bit: TX 30 and 40.

Material: Case hardened steel.

Coating: Zincotech Ag, corrosivity class C4, for outdoor use.



D	L	H	G	G2	Bits/Socket	Art.no	Quantity	Pack.	MB	
6.5	130	7.5	52	52	30	B8665130	1500	Bulk pack		
6.5	130	7.5	52	52	30	8665130	100	Packaging	8	
*	8.2	160	9.5	63	63	40	B8682160	750	Bulk pack	
8.2	160	9.5	63	63	40	8682160	50	Packaging	6	



Produkten bedömd i
SundaHus Miljödata



EPD®
THE INTERNATIONAL EPD® SYSTEM

CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

