




**Function:** Thonic tc-rd is a round inspection hatch fitted with a surface mounted frame. Installation is very quick as the fastening plates are pre-assembled and knocked out with a hammer behind the first drywall board or between the drywall boards when installed in double drywall. The hatch comes in standard sizes from Ø 150 to Ø 400 mm. Thonic tc-rd is delivered white painted, NCS S 0502-Y. The hatch is fitted with a quick snapping lock. Thonic tc-rd can be customised a recessed design using alternative sizes, in any colour or with optional accessories such as a range of different lock models, etc.



Hole making measurements	Frame external dimensions	Light dimensions	Number of fixing pads	Locking	Art.no	Quantity
Ø 150	Ø 190	Ø 113	2	Snap lock	4415	1
Ø 200	Ø 240	Ø 163	4	Snap lock	4420	1
Ø 300	Ø 340	Ø 263	4	Snap lock	4431	1
Ø 400	Ø 440	Ø 363	6	Driver lock	4440	1

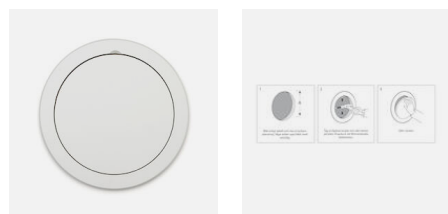

Produkten bedömd i  
SundaHus Miljödata

