


Product datasheet

Flooring screw extreme for wood stud

V/S/B
VÄSTSVENSK BYGGSKRUV AB

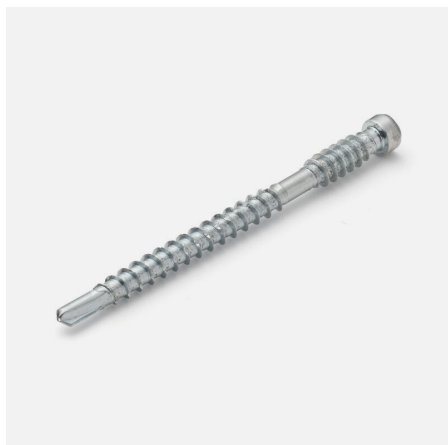

Function: Patented design with reduced drill tip for anchoring in wood. The drill bit pre-drills and the threads under the skull fix the wood detail at the same time as the cylindrical head is sunk into the material. Suitable for assembly of solid wood floors, panels, moldings, etc.


Track type bit: TX 20.

Material: Case hardened steel.

Coating: Zinc-plated 5 my, for indoor use.

V/S/B
VÄSTSVENSK BYGGSKRUV AB

Note: When installing in wood, screw at 45°.



D	L	G	Max comp. thick. app. mm	Art.no	E-number	Quantity	Pack.	MB
4.2	48	31	17	9048		3500	Bulk pack	
4.2	48	31	17	9148		500	Packaging	8
4.2	48	31	17	9948		200	Packaging	16
4.2	62	41	30	9062		3000	Bulk pack	
4.2	62	41	30	9162		300	Packaging	8
4.2	62	41	30	9962		150	Packaging	16



Produkten bedömd i
SundaHus Miljödata



EPD®
THE INTERNATIONAL EPD® SYSTEM

CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Bråmhult
Sweden

