


# Product datasheet

Hard drywall screw combi for wood studs  
and steel plates max 1 mm

**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB

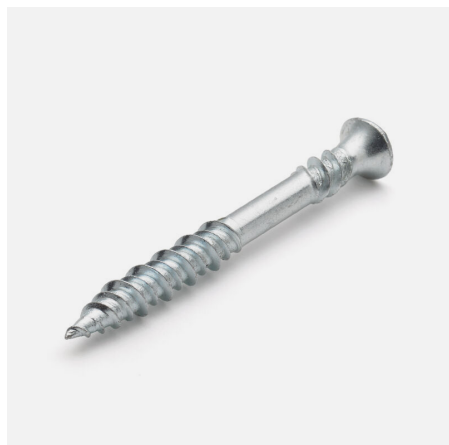

**Function:** Straight tip with double thread wood and steel grooves (Hi-low) that grip immediately, and penetrate the steel and wood stud very quickly. The reversing threads underneath the head allows the screw to sink into the drywall board without any problems.

**Track type bit:** Philips 2.

**Material:** Case hardened steel.

**Coating:** Zinc-plated 5 my, for indoor use.

**Installation instructions:** A power screwdriver with depth stop, speed of 2,000-5,000 rpm is recommended.

**Sizing:** Around 15 pcs/m<sup>2</sup>, screw spacing 20 cm on the edge of the sheet and 30 cm on the inner section.

**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB



D	L	G	Art.no	E-number	Quantity	Pack.	MB
4.2	25	15	1025		10000	Bulk pack	
4.2	25	15	1125		1000	Packaging	8
4.2	25	15	1225		250	Packaging	16
4.2	32	22	1032		8000	Bulk pack	
4.2	32	22	11329		800	Packaging	8
4.2	32	22	1232		250	Packaging	16
4.2	32	22	SB1132		25	Pack	10
4.2	41	22	1041		5000	Bulk pack	
4.2	41	22	11419		600	Packaging	8
4.2	41	22	1241		200	Packaging	16
4.2	41	22	SB1141		20	Pack	10
4.2	51	30	1051		3500	Bulk pack	
4.2	51	30	11519		400	Packaging	8
4.2	51	30	1251		200	Packaging	12

NOTE: Packs are only sold in multiples of ten.



## CUSTOMER SERVICE

Tel. 033-23 03 03  
Email: vsb@vsbyggskruv.se  
Website: vsbyggskruv.se

## ADDRESS

Västsvensk Byggskruv AB  
Vävlagargatan 7  
507 30 Brämhult  
Sweden

