


Product datasheet

Decking screw (external) for wood stud

V/S/B
VÄSTSVENSK BYGGSKRUV AB

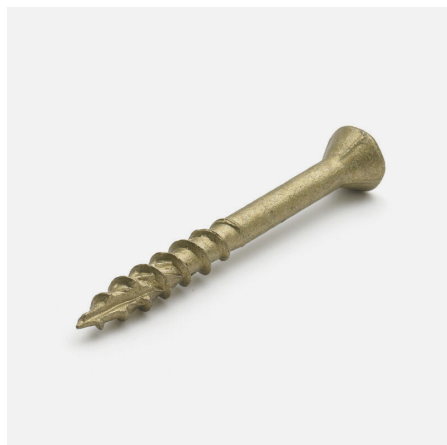

Function: Sharp tip and threads adapted for anchoring in wood. The threads immediately grip and tighten the screw to the decking, while the grooves underneath the head sink the screw. Suitable for installing decking, balconies, fences etc. The unique tightening features of the screw have been achieved by providing the screw with a cutting drill tip, as well as with oblique and longitudinal flanks between the threads. This provides the following benefits:

- Less risk of cracks in wood.
- Lower torque when tightening.
- Less screwing time.

Track type bit: TX 20.


Material: Case hardened steel.

Coating: Zincotech Au, corrosivity class C4, for outdoor use.

Installation instructions: A power screwdriver with depth stop is recommended, countersunk head approximately 2 mm.

Sizing: About 30 pcs/m².

TURBO
TRALLSKRUV®

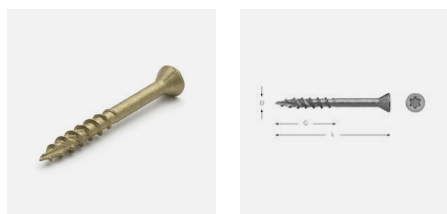

D	L	G	Max comp. thick. app. mm	Art.no	E-number	Quantity	Pack.	MB
4.2	30	19		B930		8000	Bulk pack	
4.2	30	19		930		1000	Packaging	8
4.2	30	19		P930		900	Plastic box	8
4.2	30	19		P93000		250	Plastic box	16
4.2	30	19		93000		250	Packaging	16
4.2	30	19		SB930		50	Pack	10
4.2	41	22	22	B941		5000	Bulk pack	
4.2	41	22	22	A9419		1800	Large box	
4.2	41	22	22	H98419		1800	Tub	
4.2	41	22	22	9419		600	Packaging	8
4.2	41	22	22	P9419		500	Plastic box	8
4.2	41	22	22	P94100		200	Plastic box	16
4.2	41	22	22	94100	1535019	200	Packaging	16
4.2	41	22	22	SB941		40	Pack	10
4.2	51	22	28	B951		3500	Bulk pack	
4.2	51	22	28	P951		500	Plastic box	8

1/3

CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden



Product datasheet

Decking screw (external) for wood stud



D	L	G	Max comp. thick. app. mm	Art.no	E-number	Quantity	Pack.	MB
4.2	51	22	28	P95100		150	Plastic box	16
4.2	57	26	28	B957		3500	Bulk pack	
4.2	57	26	28	H9857		1400	Tub	
4.2	57	26	28	A9579		1200	Large box	
4.2	57	26	28	957		500	Packaging	8
4.2	57	26	28	P957		400	Plastic box	8
4.2	57	26	28	P95700		150	Plastic box	16
4.2	57	26	28	95700	1535021	150	Packaging	16
4.2	57	26	28	SB957		30	Pack	10
4.8	57	26	28	B959		2500	Bulk pack	
4.8	57	26	28	A959		1000	Large box	
4.8	57	26	28	959		350	Packaging	8
4.8	57	26	28	P959		300	Plastic box	8
4.8	57	26	28	P95900		100	Plastic box	16
4.8	57	26	28	95900		100	Packaging	16
4.8	75	35	34	B975		2000	Bulk pack	
4.8	75	35	34	A9759		750	Large box	
4.8	75	35	34	H98759		750	Tub	
4.8	75	35	34	975		250	Packaging	8
4.8	75	35	34	P975		200	Plastic box	8
4.8	75	35	34	P97500		100	Plastic box	12
4.8	75	35	34	97500	1535022	100	Packaging	16
4.8	75	35	34	SB975		10	Pack	10
4.8	90	42		B990		2000	Bulk pack	
4.8	90	42		P990		200	Plastic box	8
4.8	90	42		990		200	Packaging	8
4.8	110	50		B9910		1500	Bulk pack	
4.8	110	50		P9910		100	Plastic box	8

NOTE: Packs are only sold in multiples of ten.

2/3

CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden



Product datasheet

Decking screw (external) for wood stud



D	L	G	Max comp. thick. app. mm	Art.no	E-number	Quantity	Pack.	MB
4.8	110	50		9910		100	Packaging	8
4.8	110	50		SB9910		5	Pack	10

NOTE: Packs are only sold in multiples of ten.

CUSTOMER SERVICE

Tel. 033-23 03 03
Email: vsb@vsbyggskruv.se
Website: vsbyggskruv.se

ADDRESS

Västsvensk Byggskruv AB
Vävlagargatan 7
507 30 Brämhult
Sweden

