


# Product datasheet

Decking screw cylindrical (external) for wood stud

V/S/B  
VÄSTSVENSK BYGGSKRUV AB

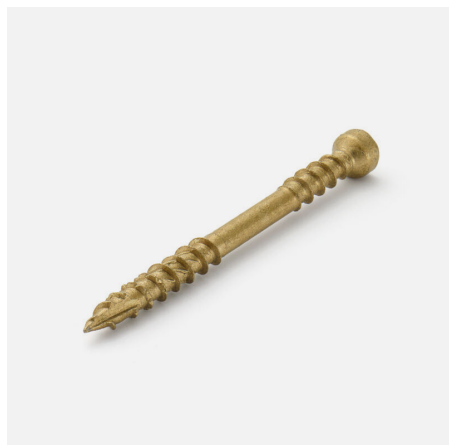

**Function:** Patented design with sharp tip and threads adapted for anchoring in wood. The threads immediately grip and tighten the screw to the decking. The threads underneath the head fix the decking while the head sinks by itself. Suitable for installing decking, balconies, fences etc. The unique tightening features of the screw have been achieved by providing the screw with a cutting drill tip, as well as with oblique and longitudinal flanks between the threads. This provides the following benefits:

- Less risk of cracks in wood.
- Lower torque when tightening.
- Less screwing time.


**Track type bit:** TX 20.

**Material:** Case hardened steel.

**Coating:** Zincotech Au, corrosivity class C4, for outdoor use.

**Installation instructions:** A power screwdriver with depth stop is recommended, countersunk head approximately 2 mm.

**Sizing:** About 30 pcs/m<sup>2</sup>.

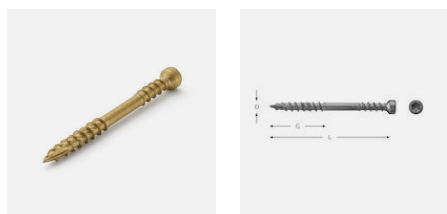

D	L	G	Max comp. thick. app. mm	Art.no	E-number	Quantity	Pack.	MB
4.8	60	27	28	B9557		2500	Bulk pack	
4.8	60	27	28	A9557		750	Large box	
4.8	60	27	28	H9557		750	Tub	
4.8	60	27	28	9557		350	Packaging	8
4.8	60	27	28	P9557		300	Plastic box	8
4.8	60	27	28	P955700		150	Plastic box	12
4.8	60	27	28	955700		150	Packaging	16
4.8	75	34	34	B9575		1500	Bulk pack	
4.8	75	34	34	A9575		600	Large box	
4.8	75	34	34	H9575		600	Tub	
4.8	75	34	34	9575		250	Packaging	8
4.8	75	34	34	P9575		200	Plastic box	8
4.8	75	34	34	P957500		100	Plastic box	12
4.8	75	34	34	957500		100	Packaging	16

1/1

## CUSTOMER SERVICE

Tel. 033-23 03 03  
Email: vsb@vsbyggskruv.se  
Website: vsbyggskruv.se

## ADDRESS

Västsvensk Byggskruv AB  
Vävlagargatan 7  
507 30 Bråmhult  
Sweden

