


# Thonic tc-ue surface mounted

**V/S/B**  
VÄSTSVENSK BYGGSKRUV AB

**thonic**

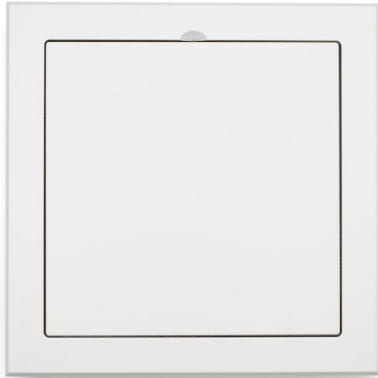

**Function:** Thonic tc-ue is a traditional inspection hatch fitted with a surface mounted frame. Installation is very quick as the fastening plates are pre-assembled and knocked out with a hammer behind the first drywall board or between the drywall boards when installed in double drywall. The hatch comes in standard sizes from 150 x 150 to 600 x 600 mm. Thonic tc-ue is delivered white painted, NCS S 0502-Y. For sizes up to 300 x 300 mm, the hatch has a self-fixing lock. For sizes larger than 300 x 300 mm, the hatch is fitted with a countersunk drive lock. When installing on ceilings, we recommend that the hatch be fitted with a hinged tc-gj and drive lock tc-ml. Thonic tc-ue can be customised with other sizes, in any colour or with optional accessories such as a range of hinges, lock models, etc.



Hole making measurements	Frame external dimensions	Light dimensions	Number of fixing pads	Locking	Art.no	Quantity
150 x 150	190 x 190	113 x 113	2	Snap lock	4015	1
150 x 200	190 x 240	113 x 163	4	Snap lock	4017	1
200 x 200	240 x 240	163 x 163	4	Snap lock	4020	1
200 x 300	240 x 340	163 x 263	4	Snap lock	4025	1
300 x 300	340 x 340	263 x 263	4	Snap lock	4030	1
300 x 400	340 x 440	263 x 363	6	Driver lock	4035	1
400 x 400	440 x 440	363 x 363	8	Driver lock	4040	1
500 x 500	540 x 540	463 x 463	8	Driver lock	4050	1
500 x 600	540 x 640	463 x 563	10	Driver lock	4055	1
600 x 600	640 x 640	563 x 563	12	Driver lock	4060	1

**BASTA**   Produkten bedömd i SundaHus Miljödata

**BYGGVARU**  **BEDÖMNINGEN** 

1/1

## CUSTOMER SERVICE

Tel. 033-23 03 03  
Fax 033-23 08 23  
Email: vsb@vsbyggskruv.se  
Website: vsbyggskruv.se

## ADDRESS

Västsvensk Byggskruv AB  
Vävlagargatan 7  
507 30 Brämhult  
Sweden

